




Photometric Data

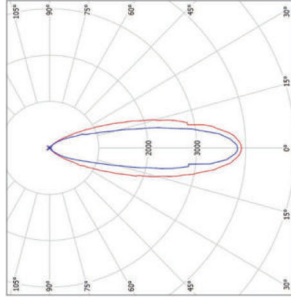

20°x40°(3000K/4000K)

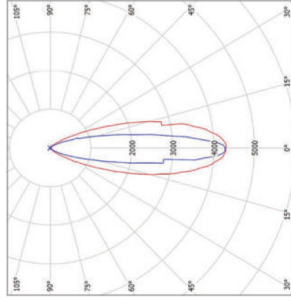

15°x30°(RGB)

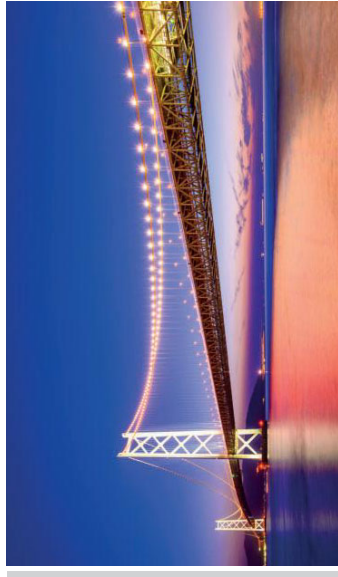

LED Outdoor Contour E



8yrs Care Free



Impact Resistant



Dustproof & Waterproof



Rustproof



Uniform Light

Application



Landscape



Building



Bridge

Specification

Item Code	Item Description	Wattage (W)	CCCT (K)	Input Voltage (VDC)	Input Current (mA)	Beam Angle (°)	Lumen (lm)	Lifetime (L70B50)
713000007210	LED Contour-E L1000 12W-RGB-105D-GP	12	RGB	24	500	105	240	30000
713000007710	LED Contour-E L500 6W-RGB-105D-GP	6	RGB	24	250	105	120	30000
713000007010	LED Contour-E L300 3W-RGB-105D-GP	3	RGB	24	130	105	60	30000

Technical Specifications

Dimmable	Yes
Beam Angle	105D
Housing Colour	Grey
IP	IP65
IK	IK06
Glow wire test	650°C
Weight	0.61kg/1.0m, 0.31kg/0.6m, 0.16kg/0.3m

Electrical Supply

Voltage(V)	24
AC/DC	DC

Mechanical Properties

Housing Material	Aluminium
Optical Material	PC

Application Conditions

Operating Temperature	-20-45°C
Storage Environment	-25-65°C

Packaging Information

Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
713000007210	LED Contour-E L1000 12W-RGB-105D-GP	1100*175*220	13.35	20
713000007710	LED Contour-E L500 6W-RGB-105D-GP	1100*175*220	14.75	40
713000007010	LED Contour-E L300 3W-RGB-105D-GP	630*175*220	9.55	40

Installation Accessory

Item Code	Item Description	Dimensions(mm) (LxWxH)	Outer box Gross Weight (kg)	Packing Qty (pcs/unit)
71409800170	R5pin-powercable2*0.75*3*0.3mm2-250mm	530*340*245	6.5	400
71409800180	R5pin-linkcable2*0.75*3*0.3mm2-180mm	530*340*245	6.5	400
71409800190	R5pin-TecC2*1.5*2 (2*0.75*3*0.3mm2) -300mm	530*340*245	4	150

Controller Accessory


Item Code	Item Description	Rated Voltage(V)	Rated Power(W)	Dimensions(mm) (LxWxH)	Outer box Gross Weight (kg)	Packing Qty (pcs/CTN)
82100100100	Sub-controller-MR-BFTB-DMX512	100-240	15	480*48*250	15	10
401001056000	LED Powersupply-MW-ELG-75W-24V-IP67	100-240	75	360*250*220	13.5	9
401001055000	LED Powersupply-MW-ELG-150W-24V-IP67	100-240	150	360*290*210	16	16
401001054000	LED Powersupply-MW-ELG-300W-24V-IP67	100-240	300	340*320*210	5	9

Dimensional Drawing




Model	L (mm)	W (mm)	H1 (mm)	H2 (mm)
LED-CL-E-12W	1000	33.5	48.1	52.8
LED-CL-E-6W	500	33.5	48.1	52.8
LED-CL-E-3W	260	33.5	48.1	52.8

Photometric Data

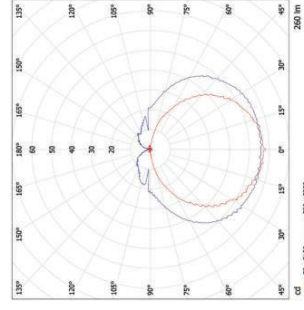

105D

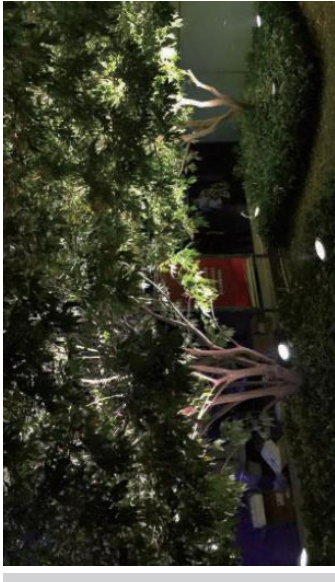

LED Outdoor Spot E2



30000 hrs

8yrs Care Free Impact Resistant

IP66 Dustproof & Waterproof

Rustproof

Anti-glare

Application

Landscape

Square

Facades


Specification

Item Code	Item Description	Power (W)	CCT (K)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Beam Angle (°)	Life Time (L70B50)	MOQ (pcs)
709000008600	LED Outdoor Spot-EI118W-3000-8D-GY-GP	9	3000	0.5	810	90	71	8	30000	100
709000009100	LED Outdoor Spot-EI118W-3000-24D-GY-GP	9	3000	0.5	650	72	71	24	30000	100
709000010100	LED Outdoor Spot-EI118W-3000-36D-GY-GP	9	3000	0.5	700	78	71	36	30000	100
709000009600	LED Outdoor Spot-EI118W-3000-8D-GY-GP	18	3000	0.5	1600	89	160	8	30000	100
709000009500	LED Outdoor Spot-EI118W-3000-12D-GY-GP	18	3000	0.5	1500	83	160	12	30000	100
709000009800	LED Outdoor Spot-EI118W-3000-24D-GY-GP	18	3000	0.5	1500	83	160	24	30000	100
709000010000	LED Outdoor Spot-EI118W-3000-36D-GY-GP	18	3000	0.5	1500	83	160	36	30000	100
709000008000	LED Outdoor Spot-EI136W-3000-8D-GY-GP	36	3000	0.9	3200	89	170	8	30000	100
709000008800	LED Outdoor Spot-EI136W-3000-12D-GY-GP	36	3000	0.9	3000	83	170	12	30000	100
709000009300	LED Outdoor Spot-EI136W-3000-24D-GY-GP	36	3000	0.9	3000	83	170	24	30000	100
709000010200	LED Outdoor Spot-EI136W-3000-36D-GY-GP	36	3000	0.9	3000	83	170	36	30000	100

Technical Specifications	
CRI	>=80
Colour Consistency (SDCM)	7
Dimmable	No
Housing Colour	Black
IP	IP66
IK	IK06
Driver Integrated (Yes/No)	Yes
Glow wire test	650°C
Weight (kg/pc)	0.8/0.92/1.5


Electrical Supply	
Frequency (Hz)	50 / 60
Voltage (V)	220-240
AC / DC	AC
Mechanical Properties	
Housing Material	Die-casting Aluminum
Optical Material	Toughen Glass
Application Conditions	
Operating Temperature	-30~50°C
Application Temperature	25°C
Storage Environment	-30~50°C

Dimensional Drawing




Model	Φ1(mm)	Φ2(mm)	H1(mm)	H2(mm)
LED 05-EII 9W	82	82	25	83
LED 05-EII 18W	82	126	25	104
LED 05-EII 36W	82	155	25	119


Photometric Data




8D



12D



24D



36D

Packaging Information

Item Code	Item Description	Single Box (pc/box)		Packaging Unit	
		Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)
709000008600	LED Outdoor Spot-EII 9W-3000-8D-GY-GP	118*118*165	0.82	490*370*185	10.31
709000009100	LED Outdoor Spot-EII 9W-3000-24D-GY-GP	118*118*165	0.82	490*370*185	10.31
709000010100	LED Outdoor Spot-EII 9W-3000-36D-GY-GP	118*118*165	0.82	490*370*185	10.31
709000009600	LED Outdoor Spot-EII 18W-3000-8D-GY-GP	163*163*155	1.02	510*345*175	7.8
709000009500	LED Outdoor Spot-EII 18W-3000-12D-GY-GP	163*163*155	1.02	510*345*175	7.8
709000009800	LED Outdoor Spot-EII 18W-3000-24D-GY-GP	163*163*155	1.02	510*345*175	7.8
709000010000	LED Outdoor Spot-EII 18W-3000-36D-GY-GP	163*163*155	1.02	510*345*175	7.8
709000008800	LED Outdoor Spot-EII 36W-3000-8D-GY-GP	193*193*170	1.65	405*405*195	7.0
709000008800	LED Outdoor Spot-EII 36W-3000-12D-GY-GP	193*193*170	1.65	405*405*195	7.0
709000009300	LED Outdoor Spot-EII 36W-3000-24D-GY-GP	193*193*170	1.65	405*405*195	7.0
709000010200	LED Outdoor Spot-EII 36W-3000-36D-GY-GP	193*193*170	1.65	405*405*195	7.0

Accessory

Item Code	Item Description	Housing Color	Gross Weight(kg/pc)	Packaging Qty (pcs)	MOQ(pcs)	Picture
709098000100	LED Outdoor Spot-E Spike-EL	Black	3	20	100	